

# HAMMER - S

Favaretto & Partners / 2017



1 SEATING

## Armchair

**Frame:** metal Ø 30 mm tube joined with a special die-cast aluminium component where arm and leg meet.

**Back:** with metal inner insert and cold-injected polyurethane foam. Seat with plywood and non-deformable polyurethane foam.

**Fire retardant inner padding meets "California Bulletin 117A", EN1021-1/2:2014 and "Italian Class 1IM" Standards.**

Special foam meeting the 5852 British Standards is available on request.

**Covers:** fabric, faux-leather, leather or C.O.M (preferably in solid colours), with standard or saddle stitching.



## Awards:

2017: Good Design Award by the Chicago Athenaeum for Design Excellence and Innovation  
2018: Red Dot Award Product Design  
2019: IF Design Award


For Hammer M-L, see "Lounge seating" section.



Article	Upholstery	Powder coated frame and die-cast element	Powder coated frame/ chromed die-cast element	Chromed frame and die-cast element	Frame 07, 59, 57 and powder coated die-cast element	pcs / dimensions volume / gross weight product net weight
Armchair S 4 legs Standard Stitching	I220 Gazebo Xtreme Plus / Magnum / Rivet / Main Line Flax Blazer / Gingko / Step Melange / Silvertex / Remix3 Steelcut Trio3 / Atlas / Canvas2 Leather C.O.L. C.O. faux leather / C.O.M. (solid colour)					1 pc / 61x63x80 cm 0,32 m3 / 14 Kg 11,5 Kg
Armchair S 4 legs Saddle Stitching	I230 Gazebo Xtreme Plus / Magnum / Rivet / Main Line Flax Blazer / Gingko / Step Melange / Silvertex / Remix3 Steelcut Trio3 / Atlas / Canvas2 C.O. faux leather / C.O.M. (solid colour)					1 pc / 61x63x80 cm 0,32 m3 / 14 Kg 11,5 Kg

## Finishes

### Frame

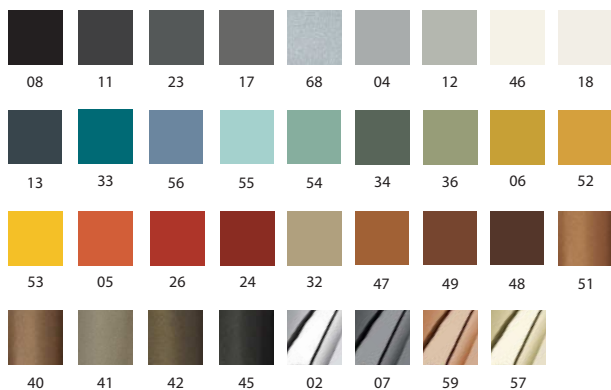

Saddle stitching

## Additional costs


Upholstery in two different materials and/or different colours of the same materials

## Customer's own material

For customer's own material/leather, the form at the end of the price list shall apply, to be sent to Segis Spa with the Client's signature.

Art. I220 - I230  
Solid colour: for 1 pc 165 cm (H.140 cm)  
C.O.L. qty.: for 1 pc 2,75 m2

## Dimensions



## Resistance tests

ANSI-BIFMA X5.11-2015/12 - stability test  
ANSI-BIFMA X5.11-2015/16 - back fatigue test  
ANSI-BIFMA X5.11-2015/7 - back durability test  
ANSI-BIFMA X5.11-2015/18 - front and side legs static load  
ANSI-BIFMA X5.11:2015/23 - frame durability test  
ANSI-BIFMA X5.11:2015/19 - arms durability test  
ANSI-BIFMA X5.11-2015/13 - armrest vertical static load test  
ANSI-BIFMA X5.11-2015/14 - armrest horizontal static load test